


Astro R Mini



Performance

| Lumen Output | Wattage | lm/cW |
|----------------|---------|-------|
| 1050lm (4000K) | 9.6 W | 109.4 |
| 1600lm (4000K) | 14.6 W | 109.5 |
| 2150lm (4000K) | 19.6 W | 109.7 |

| | |
|----------------------------------|-------------------|
| Rated Supply Voltage | 220—240 V |
| AC Voltage Range | 198—264 V |
| Mains Frequency | 50/60 Hz |
| Output LF Current Ripple @ 120Hz | <5% |
| Overvoltage Protection | 320 V |
| In-rush Current | 2.5 A |
| THD | <10% |
| Dimming Type (Optional) | DALI |
| Operating Temperature | -25 +60 °C |
| Colour Rendering (3 SDCM) | Ra>82 |
| Longevity (L70/B10) | 60,000 hours |
| IP Rating (when surface mounted) | IP44 |
| Surface Fixing | 90mm |
| Suspended Fixing (Optional) | 2m Suspension Max |
| Dimensions | Ø130 x 150mm |
| Weight | 2.2 kg |
| Warranty | 5 Years |
| Certification | CE, ROHS |

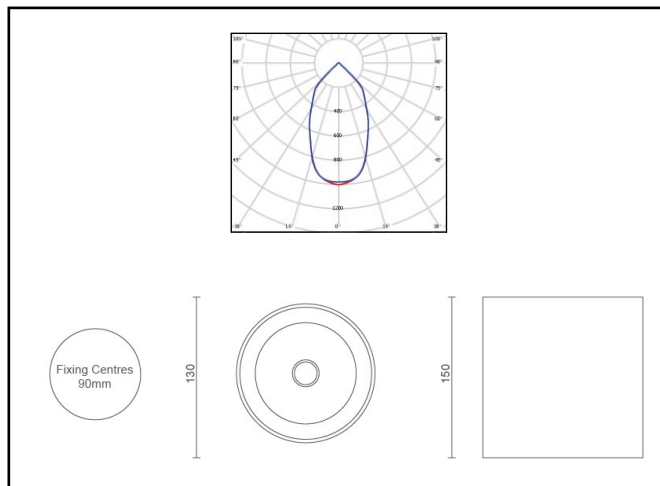

54lighting

Tel: 01202 925971 | Email: info@54lighting.co.uk | Web: www.54lighting.co.uk

54 Lighting, Arrowsmith Court, Station Approach, Poole, Dorset, BH18 8AT