

Polar 1200



Performance


Lumen Output	Wattage	lm/cW
3702lm (4000K)	27.2 W	136.1
4104lm (4000K)	30.3 W	135.4

Diffuser	Frosted Microprism (optional)
Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<1%
Overvoltage Protection	320 V
In-rush Current	12 A
THD	<20%
Dimming Type (Optional)	DALI
Operating Temperature	-25 +60 °C
UGR Rating	<19
Colour Rendering (3 SDCM)	Ra>82
Longevity (L70/B10)	70,000 hours
IP Rating	IP44
Dimensions	299 x 1199 x 75 mm
Weight	4.5 kg
Warranty	5 Years
Certification	CE, ROHS

Emergency (Optional)

BLF	Lumen Output
12%	444lm
11%	451lm

Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS

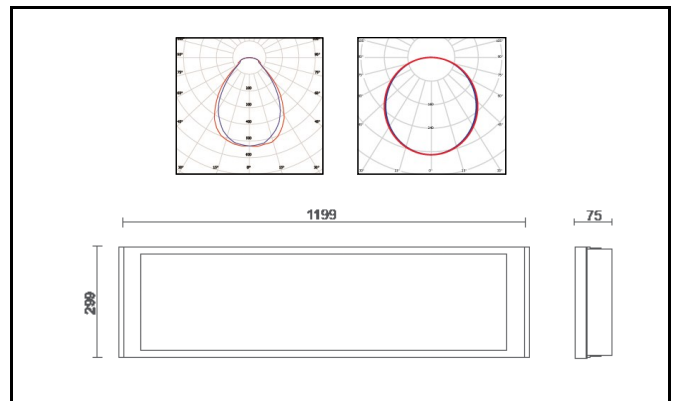

54lighting

Tel: 01202 925971 | Email: info@54lighting.co.uk | Web: www.54lighting.co.uk

54 Lighting, Arrowsmith Court, Station Approach, Poole, Dorset, BH18 8AT