

ASTRO R



Performance


Lumen Output	Wattage	lm/cW
2060lm (4000K)	19.6 W	105.10

Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<1%
Overvoltage Protection	320 V
In-rush Current	2.5 A
THD	<10%
Dimming Type (Optional)	DALI
Operating Temperature	-25 +60 °C
Colour Rendering (3 SDCM)	Ra>82
Longevity (L70/B10)	60,000 hours
IP Rating (when surface mounted)	IP44
Beam Angle	60 Degrees
UGR	13>
Dimensions	Ø186 x 214mm
Weight	3.1 kg
Warranty	5 Years
Certification	CE, ROHS, UKCA

Emergency (Optional)

BLF	Lumen Output
15%	309lm

Emergency Duration	3 Hours - Dali (Integral)
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS

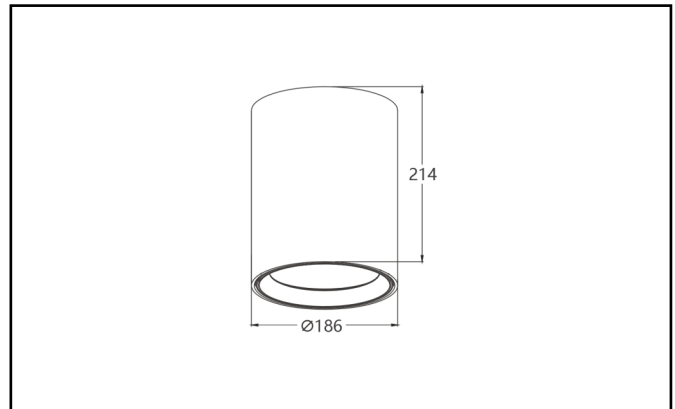

54lighting

Tel: 01342 395625 | Email: info@54lighting.co.uk | Web: www.54lighting.co.uk
 Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW