


ASTRO R Mini



| Lumen Output | Wattage | lm/cW |
|----------------|---------|--------|
| 2030lm (4000K) | 19.6W | 103.57 |

| | |
|----------------------------------|-----------------|
| Rated Supply Voltage | 220—240 V |
| AC Voltage Range | 198—264 V |
| Mains Frequency | 50/60 Hz |
| Output LF Current Ripple @ 120Hz | <5% |
| Overvoltage Protection | 320 V |
| In-rush Current | 2.5 A |
| THD | <10% |
| Dimming Type (Optional) | DALI |
| Operating Temperature | -25 +60 °C |
| Colour Rendering (3 SDCM) | CRI>90 |
| Longevity (L70/B10) | 60,000 hours |
| IP Rating (when surface mounted) | IP44 |
| Surface Fixing | 90mm |
| Suspended Fixing (Optional) | 1.5m Suspension |
| Dimensions | Ø114 x 155mm |
| Weight | 2.2 kg |
| Warranty | 5 Years |
| Certification | CE, ROHS |

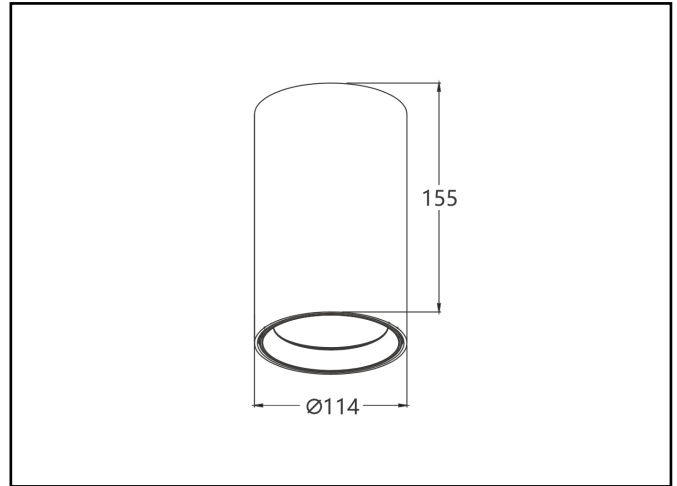

54 lighting

Tel: 01342 395625 | **Email:** info@54lighting.co.uk | **Web:** www.54lighting.co.uk
Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW