

ECLIPSE Ø1000mm



Performance


| Lumen Output | Wattage | lm/cW |
|--------------|---------|--------|
| 9600lm | 96W | 100.00 |

| | |
|----------------------------------|---------------|
| Rated Supply Voltage | 220—240 V |
| AC Voltage Range | 198—264 V |
| Mains Frequency | 50/60 Hz |
| Output LF Current Ripple @ 120Hz | <5% |
| Overvoltage Protection | 320 V |
| In-rush Current | 5 A |
| THD | <10% |
| Dimming Type | DALI |
| Operating Temperature | -25... +60 °C |
| Longevity (L80/B10) | 60,000 hours |
| Colour Rendering (3 SDCM) | Ra>82 |
| IP Rating | IP44 |
| Dimensions | Ø1000 x 65mm |
| Weight | 3.9 kg |
| Warranty | 5 Years |
| Certification | CE, ROHS |

Emergency (Optional)

| BLF | Lumen Output |
|-----|--------------|
| 4% | 384lm |

| | |
|-----------------------|----------------------------------|
| Emergency Type | DALI Reporting |
| Emergency Duration | 3 Hours |
| Recharge Period | 24 Hours |
| Battery Type | LiFePO4 (Lithium Iron Phosphate) |
| Battery Pack | 3 x 3.2V 1.5Ah |
| Parasitic Load | 1.2W |
| Operating Temperature | 0—60 °C |
| Power Efficiency | 95% |
| Certification | CE, ROHS |

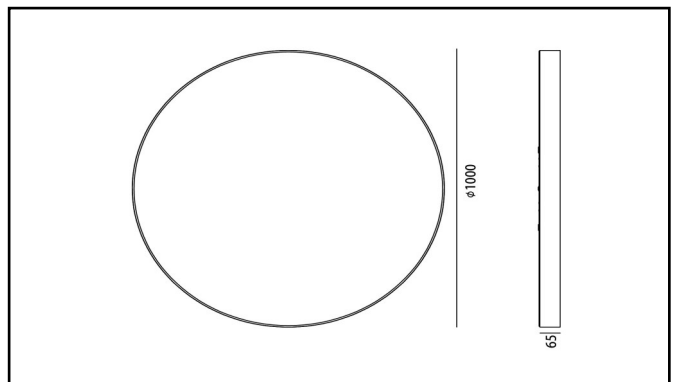

54lighting

Tel: 01342 395625 | **Email:** info@54lighting.co.uk | **Web:** www.54lighting.co.uk
Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW