

# ECLIPSE Ø300mm



## Performance


Lumen Output	Wattage	lm/cW
3000lm	30W	100.00

Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<5%
Overvoltage Protection	320 V
In-rush Current	5 A
THD	<10%
Dimming Type	DALI
Operating Temperature	-25... +60 °C
Longevity (L80/B10)	60,000 hours
Colour Rendering (3 SDCM)	Ra>82
IP Rating	IP44
Dimensions	Ø300 x 65mm
Weight	2.2 kg
Warranty	5 Years
Certification	CE, ROHS

## Emergency (Optional)

BLF	Lumen Output
10%	300lm

Emergency Type	DALI Reporting
Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS

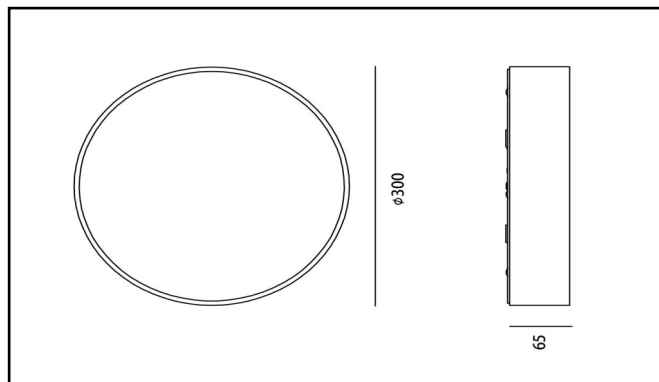

**54**lighting

**Tel:** 01342 395625 | **Email:** [info@54lighting.co.uk](mailto:info@54lighting.co.uk) | **Web:** [www.54lighting.co.uk](http://www.54lighting.co.uk)  
Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW