

# MARVEL Recessed




## Performance

Wattage	3W
Rated Supply Voltage	210—240 V
Mains Frequency	50/60 Hz
Visibility	25m
Light Source	LED
Luminance	200-400cdm2
Testing	DALI
Insulation Class	II
Operating Temperature	-10 +35 °C
Longevity (L70/B10)	50,000 hours
IP Rating	IP20
Mounting Type	Recessed
Dimensions (Excluding Sign)	250 x 194 x 29mm
Material	PC/ABS (housing)
Warranty	5 Years
Certification	CE, ROHS, ENEC, Kitemark

## Emergency (Optional)

Emergency Duration	3 Hours/ DALI
Recharge Period	24 Hours
Battery Type	NICD or LiFePO4 (Lithium Iron Phosphate)
Certification	CE, ROHS, ENEC, Kitemark

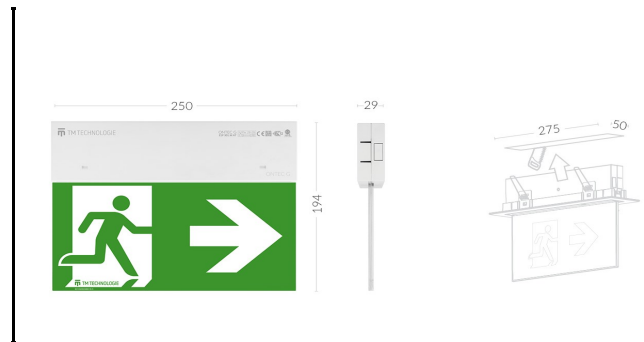

**54** lighting

Tel: 01342 395625 | Email: [info@54lighting.co.uk](mailto:info@54lighting.co.uk) | Web: [www.54lighting.co.uk](http://www.54lighting.co.uk)

3 East Point High Street, Seal, Sevenoaks, England, TN15 0EG

