

SWIVALEX



Performance


Lumen Output	Wattage	lm/cW
2100lm - 2500lm - 3000lm	18W - 22W - 25.5W	

Emergency (Optional)

BLF	Lumen Output

Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<5%
Overvoltage Protection	320 V
In-rush Current	5 A
THD	<10%
Dimming Type	Fixed Output Or Dali
Operating Temperature	-25... +60 °C
Longevity (L80/B10)	60,000 hours
Colour Rendering (3 SDCM)	Ra>80
IP Rating	IP44
Dimensions	∅200/250/300 x 65mm
Weight	2.6 kg
Warranty	5 Years
Certification	CE, ROHS

Emergency Type	Standard 3H/ DALI Reporting
Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS

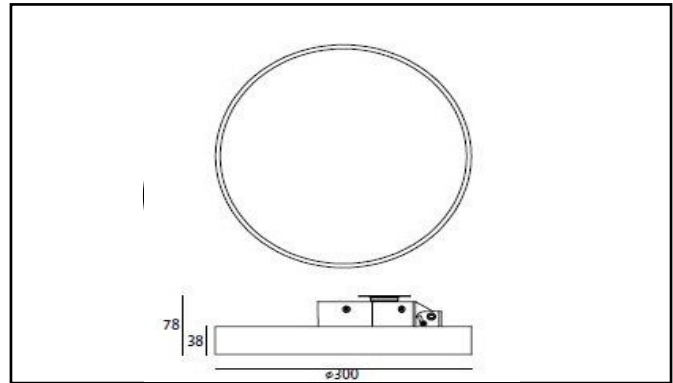

54 lighting

Tel: 01342 395625 | Email: info@54lighting.co.uk | Web: www.54lighting.co.uk
 Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW