

SPEC SHEET

MOONBELL LED Pendants



Features

- Highly effective noise absorption
- wide range of colors
- High performance direct distribution
- UGR<19
- Height adjustable 3m suspensions and clear teflon cable
- Can be mounted flush to ceiling



220-240V



DIM



IP20

RoHS


www.54lighting.co.uk

54 lighting


MOONBELL

Pendant Light

DIMENSIONS

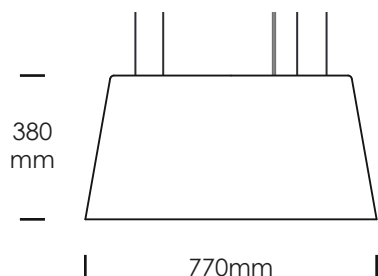

DISTRIBUTIONS

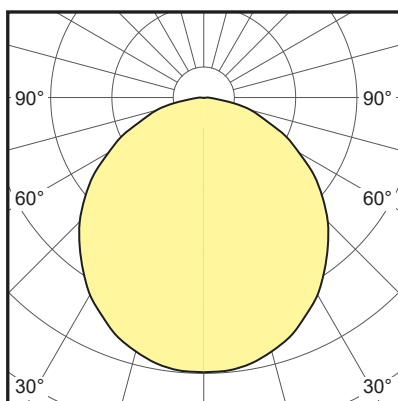

MATERIAL SPECIFICATIONS

MATERIAL	100% Recyclable PET fiber
DENSITY	1900g/m ²
FIRE TEST	GB8624 B1
SOUND ABSORPTION	Noise reduction coefficient (NRC) >0.8
TESTING PROCEDURE	AS ISO 354 - 2006 / AS ISO 11654 - 1997

MOONBELL

Pendant Light

MOONBELL MODEL: MB



LIGHT DISTRIBUTION	Direct
DELIVERED LUMENS	4022lm@3000K / 4261lm@4000K
EFFICACY	Up to 90lm/W
CCT	3000K / 3500K / 4000K / RGBW
CRI	> 90
POWER	47W
DIMMING	Non-dim / 0/1-10V / DALI
INPUT	220-240V AC
CABLE	Length 3 m, clear teflon cable
SIZE	φ770x380mm
FINISH	See color codes as shown
WEIGHT(NET)	9.2KG


COLOR CODE



Light Grey (LG)




Dark Grey (DG)




Black (BK)



Brown (BR)



Dark Blue (DB)



Cyan (C)



Yellow (Y)



Orange (O)