


KURVE 50 Recessed

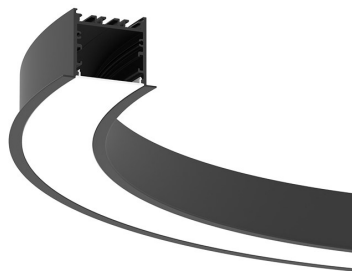


Perfor-

Diffuser Options	Opal Lens
Lumens Per Metre	1980Lm
Watts Per Metre	14.4W
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<1%
Overvoltage Protection	320 V
In-rush Current	12 A
THD	<20%
Dimming Type (optional)	DALI2
Operating Temperature	-25 + 60 °C
Colour Rendering (3 SDCM)	Ra>82
Longevity (L70/B10)	70,000 hours
Diffuser type	Opal Polycarbonate
Glare Rating	<19
Dimensions	50 x 50 mm
Weight	3.8 kg/m
Warranty	5 Years
Certification	CE, ROHS UKCA

Emergency Optional

Emergency Duration	3 Hours - DALI Emergency Optional
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0 - 60 °C
Power Efficiency	95%
Certification	CE, ROHS

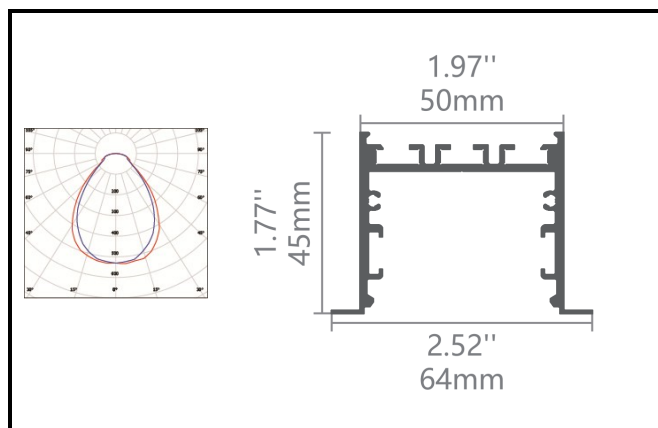

54 lighting

Tel: 01342 395625 | **Email:** info@54lighting.co.uk | **Web:** www.54lighting.co.uk
Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW