

LUNER BEZEL TRIM Ø450mm

Surface/ Suspended



Performance



Lumen Output	Wattage	lm/cW
3375lm	35.1W	96.15
3375lm (Combined)	25.1W + 10W	96.15

Emergency (Optional)


BLF	Lumen Output
10%	337.5lm
10%	337.5lm

Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<5%
Overvoltage Protection	320 V
In-rush Current	5 A
THD	<10%
Dimming Type	DALI2
Operating Temperature	-25... +60 °C
Longevity (L80/B10)	60,000 hours
Colour Rendering (3 SDCM)	Ra>82
IP Rating	IP44
Dimensions	Ø450 x 66mm
Weight	3.4 kg
Warranty	5 Years
Certification	CE, ROHS, UKCA

Emergency Type	Standard 3H - DALI Reporting
Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS, UKCA

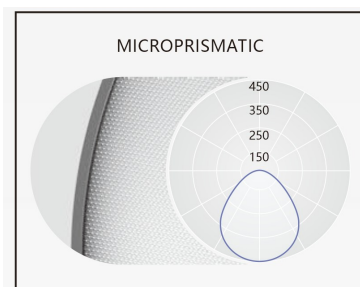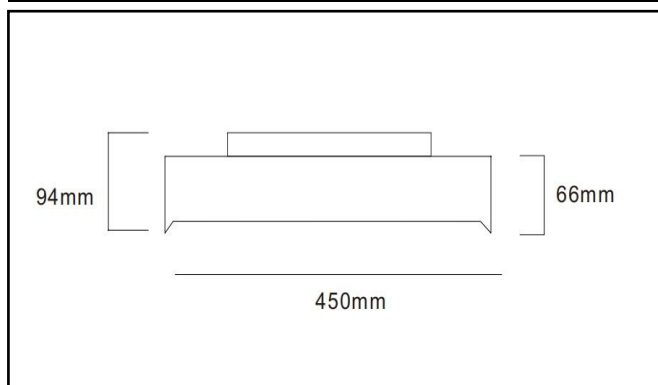

Prismatics diffuser for UGR<19



High transparency acrylic opal anti-glare diffuser

54 lighting

Tel: 01342 395625 | Email: info@54lighting.co.uk | Web: www.54lighting.co.uk

Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW