

LUNER BEZEL TRIM Ø600mm

Surface/ Suspended



Performance



Lumen Output	Wattage	lm/cw
5225lm	54.1W	96.58
5225lm (Combined)	41.1W + 13W	96.58

Emergency (Optional)


BLF	Lumen Output
8%	418lm
8%	418lm

Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<5%
Overvoltage Protection	320 V
In-rush Current	5 A
THD	<10%
Dimming Type	DALI2
Operating Temperature	-25... +60 °C
Longevity (L80/B10)	60,000 hours
Colour Rendering (3 SDCM)	Ra>82
IP Rating	IP44
Dimensions	Ø600 x 66mm
Weight	4.1 kg
Warranty	5 Years
Certification	CE, ROHS, UKCA

Emergency Type	Standard 3H - DALI Reporting
Emergency Duration	3 Hours
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS, UKCA

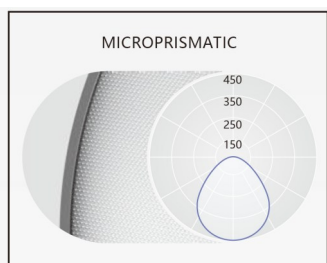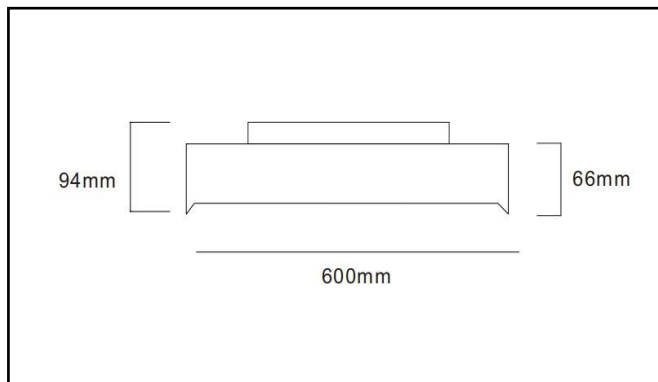

Prismatics diffuser for UGR<19

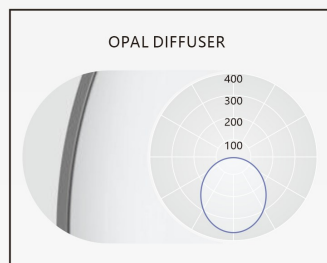

High transparency acrylic opal anti-glare diffuser

54lighting

Tel: 01342 395625 | **Email:** info@54lighting.co.uk | **Web:** www.54lighting.co.uk

Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW