

VARO100



Performance


Lumen Output	Wattage	lm/cW
1455lm	14.8W	98.31
1940lm	19.8W	97.97
2425lm	24.8W	97.78
3395lm	34.8W	97.55

Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<1%
Overvoltage Protection	320 V
In-rush Current	12 A
UGR	<13
Dimming Type	DALI2
Beam Angle	18° 24° 36° 50°
Longevity (L80/B10)	60,000 hours
Colour Rendering	CRI90
IP Rating	IP40
Cutout	Ø100mm
Dimensions	Ø111 x 125mm
Weight	1.2 kg
Warranty	5 Years
Certification	CE, ROHS, UKCA

Emergency (Optional)

BLF	Lumen Output
20%	291lm
14%	271lm
12%	291lm
9%	305lm

Emergency Duration	3 Hours - Remote - Dali Monitoring
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS, UKCA

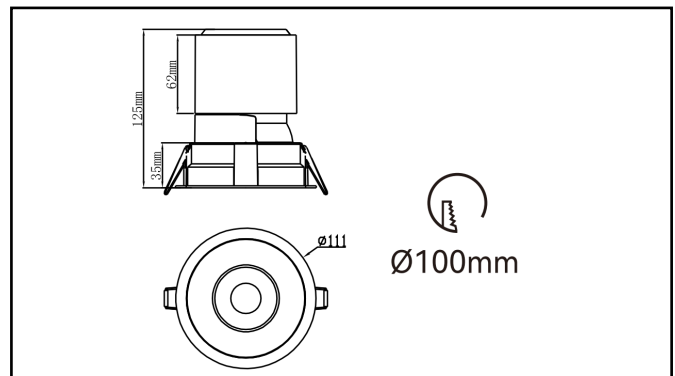

Accessories

Honey Comb Louvre
Spread Lens
Solite Lens
Different Colour Aluminium Reflector
Trimless Bezel

54lighting

Tel: 01342 395625 | Email: info@54lighting.co.uk | Web: www.54lighting.co.uk
Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW