

# VARO80 Trimless



## Performance


| Lumen Output | Wattage | lm/cW |
|--------------|---------|-------|
| 960lm        | 9.8W    | 97.96 |
| 1450lm       | 14.8W   | 97.97 |
| 1940lm       | 19.8W   | 97.97 |

## Emergency (Optional)

| BLF | Lumen Output |
|-----|--------------|
| 22% | 211lm        |
| 20% | 290lm        |
| 14% | 271lm        |

|                                  |                 |
|----------------------------------|-----------------|
| Rated Supply Voltage             | 220—240 V       |
| AC Voltage Range                 | 198—264 V       |
| Mains Frequency                  | 50/60 Hz        |
| Output LF Current Ripple @ 120Hz | <1%             |
| Overvoltage Protection           | 320 V           |
| In-rush Current                  | 12 A            |
| UGR                              | <13             |
| Dimming Type                     | DALI2           |
| Beam Angle                       | 18° 24° 36° 50° |
| Longevity (L80/B10)              | 60,000 hours    |
| Colour Rendering                 | CRI90           |
| IP Rating                        | IP40            |
| Cutout                           | Ø80-85mm        |
| Dimensions                       | Ø90 x 120mm     |
| Weight                           | 1.2 kg          |
| Warranty                         | 5 Years         |
| Certification                    | CE, ROHS, UKCA  |

|                       |                                    |
|-----------------------|------------------------------------|
| Emergency Duration    | 3 Hours - Remote - Dali Monitoring |
| Recharge Period       | 24 Hours                           |
| Battery Type          | LiFePO4 (Lithium Iron Phosphate)   |
| Battery Pack          | 3 x 3.2V 1.5Ah                     |
| Parasitic Load        | 1.2W                               |
| Operating Temperature | 0—60 °C                            |
| Power Efficiency      | 95%                                |
| Certification         | CE, ROHS, UKCA                     |

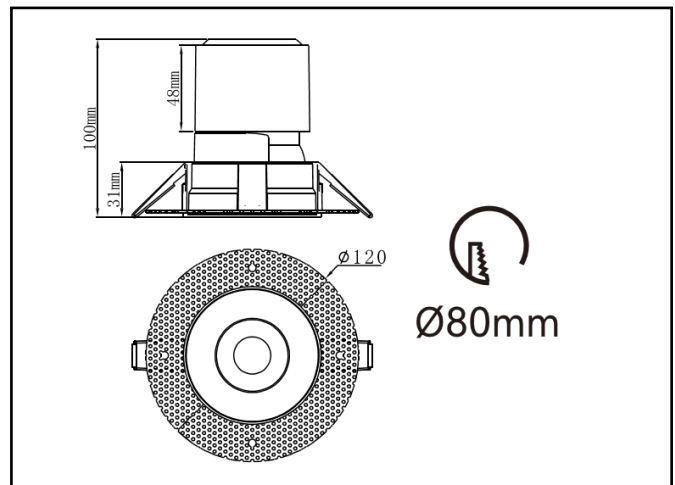

## Accessories

|                                      |
|--------------------------------------|
| Honey Comb Louvre                    |
| Spread Lens                          |
| Solite Lens                          |
| Different Colour Aluminium Reflector |
| Trimless Bezel                       |

**54** lighting

**Tel:** 01342 395625 | **Email:** info@54lighting.co.uk | **Web:** www.54lighting.co.uk  
Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW