

Performance


Lumen Output	Wattage	lm/cW
1500lm	12W	125.00
2100LM	17W	123.52

Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<5%
Overvoltage Protection	320 V
In-rush Current	1.5 A
THD	<10%
Dimming Type	DALI
Operating Temperature	-25 +60 °C
Colour Rendering	CRI82
Longevity (L80/B10)	60,000 hours
IP Rating - IK Rating	IP66 IK10
Dimensions	Ø308 x 69.5mm
Weight	2.1 kg
Warranty	5 Years
Certification	CE, ROHS

Emergency (Optional)

BLF	Lumen Output
22%	330lm
18%	378lm

Emergency Duration	3 Hours, Dali Monitoring
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS

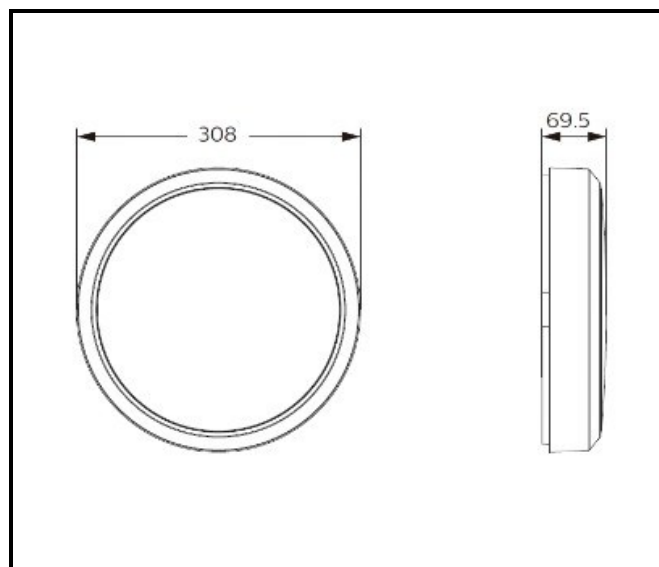

54 lighting