


PULSA 75 Louvre

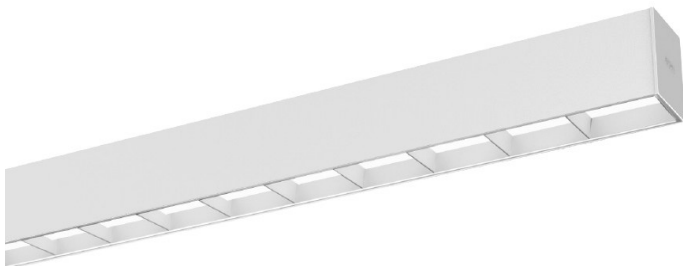


Performance

Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<2%
Overvoltage Protection	320 V
In-rush Current	12 A
THD	<20%
Dimming Type	DALI2
Operating Temperature	-25 +60 °C
Colour Rendering (3 SDCM)	Ra>82
Kelvin	4000K
Longevity (L80/B10)	60,000 hours
Diffuser type	Microprism + Louvre
Glare Rating	<17
Dimensions	75 x 84mm
Weight	3.8 kg/m
Warranty	5 Years
Certification	CE, ROHS, UKCA

Emergency Options

Emergency Duration	3 Hour - DALI2 Monitoring
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS, UKCA

60°



54 lighting

Tel: 01342 395625 | **Email:** info@54lighting.co.uk | **Web:** www.54lighting.co.uk
Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW

PULSA 75 Louvre

Standalone Length (mm)	Wattage (W)	Delivered Lumens	Performance (lm/cw)
850mm	19.2W	2400lm	125lm/cw
1130mm	23.6W	2970lm	125lm/cw
1410mm	29.8W	3735lm	125lm/cw
1700mm	36.0W	4500lm	125lm/cw
2260mm	42.0W	5265lm	125lm/cw
2820mm	48.0W	6030lm	125lm/cw
OTHER SIZES AVAILABLE			



Tel: 01342 395625 | **Email:** info@54lighting.co.uk | **Web:** www.54lighting.co.uk
Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW