

LYNN 60 Direct/Indirect




Performance

Diffuser Options	Microprism/ Down Opal/ Up
Rated Supply Voltage	220—240 V
AC Voltage Range	198—264 V
Mains Frequency	50/60 Hz
Output LF Current Ripple @ 120Hz	<2%
Overvoltage Protection	320 V
In-rush Current	12 A
THD	<20%
Dimming Type	DALI
Operating Temperature	-25 +60 °C
Colour Rendering (3 SDCM)	Ra>82
Longevity (L70/B10)	70,000 hours
Diffuser type	Microprism
Glare Rating	<19
Dimensions	60 x 90 mm
Weight	3.8 kg/m
Warranty	5 Years
Certification	CE, ROHS

Emergency

Emergency Duration	3 Hours/ DALI Emergency
Recharge Period	24 Hours
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Battery Pack	3 x 3.2V 1.5Ah
Parasitic Load	1.2W
Operating Temperature	0—60 °C
Power Efficiency	95%
Certification	CE, ROHS

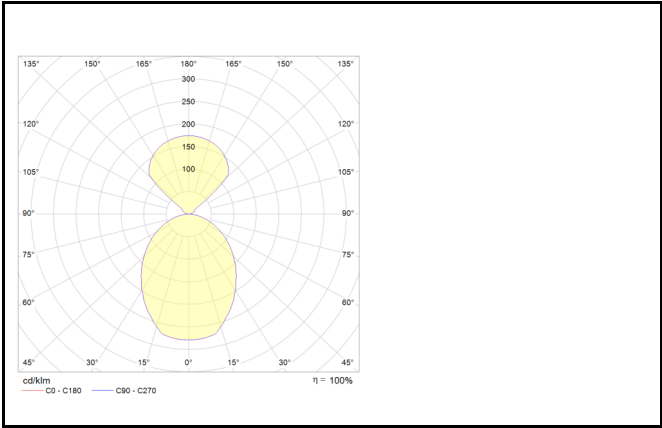

54 lighting

Tel: 01342 395625 | Email: info@54lighting.co.uk | Web: www.54lighting.co.uk
Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW

LYNN 60 Direct/Indirect

Standalone Length (mm)	Start/End Length (mm)	Middle Length (mm)	Lumen Outputs (lm)	Wattage (W)	Performance (lm/cW)
574	567	560	2830	23.1	122.5
644	637	630	3030	24.8	122.1
714	707	700	3230	26.4	122.3
784	777	770	3440	28.1	122.4
854	847	840	3640	29.7	122.5
924	917	910	3840	31.4	122.2
1064	1057	1050	4040	33	122.4
1134	1127	1120	4250	34.7	122.4
1204	1197	1190	4460	36.3	122.8
1274	1267	1260	5850	47.9	122.1
1344	1337	1330	6050	49.5	122.2
1414	1407	1400	6260	51.2	112.2
1484	1477	1470	6460	52.8	122.3
1554	1547	1540	6660	54.5	122.2
1624	1617	1610	6870	56.1	122.4
1694	1687	1680	7070	57.8	122.3
1764	1757	1750	7280	59.4	122.5
1834	1827	1820	8670	71	122.1
1904	1897	1890	8870	72.6	122.1
1974	1967	1960	9080	74.3	122.2
2044	2037	2030	9490	77.6	122.2
2114	2107	2100	9690	79.2	122.3
2184	2177	2170	9890	80.9	122.2
2254	2247	2240	10100	82.5	122.4
2324	2317	2310	11490	94.1	122.1
2394	2387	2380	11700	95.7	122.2
2464	2457	2450	11900	97.4	122.1
2534	2527	2520	12100	99	122.2
2604	2597	2590	12310	100.7	122.2
2674	2667	2660	12510	102.3	122.2
2744	2737	2730	12710	104	122.2
2814	2807	2800	12920	105.6	122.3
2884	2877	2870	14310	117.2	122.0
2954	2947	2940	14520	118.8	122.2

54 lighting

Tel: 01342 395625 | **Email:** info@54lighting.co.uk | **Web:** www.54lighting.co.uk

Unit 1, Haysbridge Farm, Farm Approach, Brickhouse Lane, South Godstone, Surrey, RH9 8JW